


Light Tape Series

Light Tape has quickly become a popular linear lighting solution because of its high brightness, flexibility, size, and ability to be cut and customized with easy-to-use accessories.

Light Tape 600

SPECIFICATIONS

Beam Angle	120° High Dome, Lambertian
Certifications	UL & cUL Recognized (SAM Manual), CE, CSA, RoHs
Dimensions (Single Color)	Indoor: 0.32"W x 196.8"L x 0.08"H Outdoor: 0.4"W x 196.8"L x 0.18"H
Dimensions (RGB)	Indoor: 0.4"W x 196.8"L x 0.18"H Outdoor: 0.47"W x 196.8"L x 0.18"H
Fastening	Peel & stick and added silicone
Input	12VDC
Max Feet (Series)	10 ft.
Operating Temp	-40° to +60°C
Packaging	16.4 ft. (5m) reel
Power	3W/ft.
Power Supply	P-LED 12VDC
Protection Grade	IP65 (-N) / IP67 (-P)
Warranty	3-Year Product

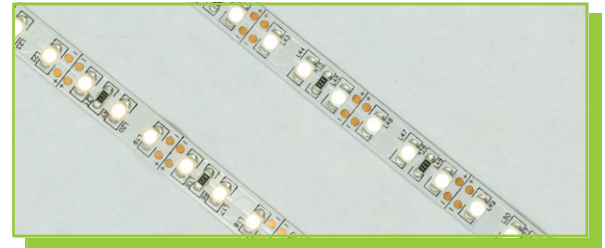

FEATURES

- Ideal applications include accent and cove lighting, edge lit acrylic, and thin channel letters
- Reduced labor and install time versus other LED systems
- VHB tape for direct mount to substrate
- Complete range of connector and control options

WIRING DETAILS

Check tape for polarity as colors vary

PRODUCT OPTIONS

Color	LED/ reel	CCT/ Wavelength	Efficacy	Intensity	Power (Watts/ft.)	Run Footage (60W Supply)	Cut Length	UL PN Indoor	Ordering PN Indoor	UL PN Outdoor	Ordering PN Outdoor
RGB x 2	300	RGB-300	N/A	N/A	3.5	17'	50mm	PL-LT1-RG3-N	M-LTID6-3C	PL-LT1-RG3-P	M-LTOD6-3C
Red x 2	600	625nm	22 LM/W	66 LM/ft.	3.0	20'	25mm			PL-LT1-RD2-P	M-LTOD6-RD
Warm White x 2	600	3100K	83 LM/W	250 LM/ft.	3.0	20'	25mm	PL-LT1-WW2-N	M-LTID6-31		
Med. White x 2	600	4300K	100 LM/W	300 LM/ft.	3.0	20'	25mm	PL-LT1-MW2-N	M-LTID6-43		
Pure White x 2	600	6300K	100 LM/W	300 LM/ft.	3.0	20'	25mm	PL-LT1-PW2-N	M-LTID6-63	PL-LT1-PW2-P	M-LTOD6-63

Note: Available in indoor (-N) IP65 and outdoor (-P) IP67 options. Y = I (indoor, IP65), O (outdoor, IP67)

Light Tape

